

# High Efficiency Exposed Trap Urinal

## **Product Features**


- 0.5 GPF (1.9 LPF) High Efficiency or 1.0 GPF (3.8 LPF) Standard Urinal
- 0.5 GPF (1.9 LPF) High Efficiency contributes toward LEED
- Washout Flush Action
- Outlet spud with 1-1/2" tubing tailpiece
- Flushing Rim
- Mounting Hardware included
- Integral Strainer
- Flush Valve not included

# **Overall Dimensions & Weight**

- 13"(W) x 12-3/4"(D) x 18-1/2"(H)
- 35 lbs


# Certifications

- IAPMO cUPC
- US EPA WaterSense
- ASME A112.19.2
- CSA B45.1-2008

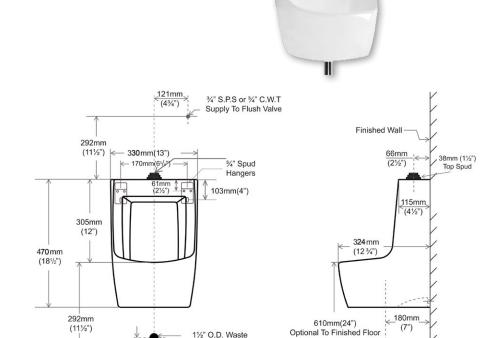

O.D. Tailpiece

✓ To Submit	Part No.	Description
	MLS10414	High Efficiency Exposed Trap Urinal



## Warranty

1 Year Limited Warranty. See warranty information for more details.

UPC ®

All dimensions listed are nominal. MAINLINE® reserves the right to make product and material changes at any time without notice.

32mm

Finished Floor

